


Kam-Lock Gaskets



Kam-lock gaskets can be supplied in a combination of Viton or Silicone Core with either FEP or PFA jacket depending on the application.

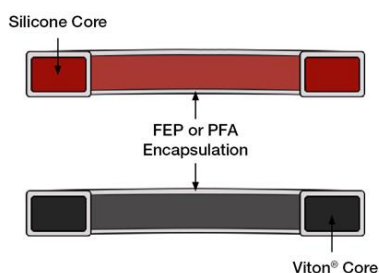

The chemical resistance of the jacket means that it can be used to seal a number of many different mediums eliminating the need for different compounds to be used.

The FEP or PFA jacket means the gaskets are suitable for use in a wide range of industries including Chemical, Pharmaceutical, Food & Dairy and Petrochemical.

Low coefficient of friction allows the gaskets to be easily installed and removed.

The range covers all the universal hose coupling sizes.

Rectangular section Kam-Lock style hose coupling gaskets

Gasket Size	Nominal Sizes
0.5"	17.00 ID x 26.00 OD x 4.00mm Thick
0.75"	22.20 ID x 35.00 OD x 5.55mm Thick
1"	27.00 ID x 39.50 OD x 6.35mm Thick
1.25"	34.50 ID x 49.20 OD x 6.35mm Thick
1.5"	41.30 ID x 55.60 OD x 6.35mm Thick
2"	50.80 ID x 66.70 OD x 6.35mm Thick
2.5"	60.30 ID x 79.40 OD x 6.35mm Thick
3"	76.20 ID x 94.50 OD x 6.35mm Thick
4"	101.60 ID x 123.60 OD x 6.35mm Thick
6"	179.40 ID x 152.40 OD x 6.35mm Thick



EASTERN SEALS
GLOBAL SEALING PROVIDER

T: +44 (0) 1670 840529 | W: www.easternseals.co.uk